



With One-Sided Support (OSS) 180°



61-METER | TRUCK-MOUNTED CONCRETE BOOM PUMP

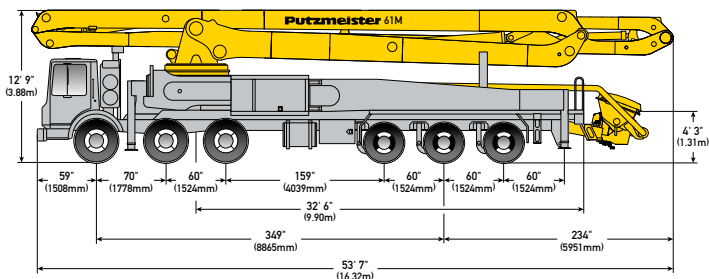

MODEL SPECIFICATIONS

Vertical reach	197' 2"	(60.10m)
Horizontal reach	183' 9"	(56.01m)
Reach from front of truck	170' 9"	(52.04m)
Reach depth	145' 4"	(44.30m)
Unfolding height	54' 2"	(16.51m)
Available pump cells		.16H, .18H LS
Front axle weight	57,246 lbs	(25,967kg)
Rear axle weight	58,718 lbs	(26,634kg)
Approximate total weight	115,964 lbs	(52,601kg)


Ergonic Pump System (EPS) is standard.
Based on Model MACK MRU 613 with .16H pump cell.

BOOM | ROLL-AND-FOLD DESIGN

1st section length	32' 2"	(9.80m)
2nd section length	45' 7"	(13.89m)
3rd section length	52' 10"	(16.10m)
4th section length	53' 2"	(16.21m)
Maximum end hose length	10' 0"	(3.00m)
Maximum end hose weight allowance	365 lbs	(166kg)

Please follow end hose weight guidelines listed in operational manual.

OUTRIGGER LOADS | FRONT AND REAR



Front	89,930 lbf	(400 kN)
Rear	77,559 lbf	(345 kN)