



With One-Sided Support (OSS) 180°

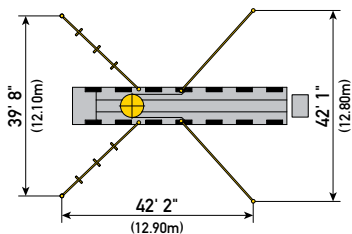

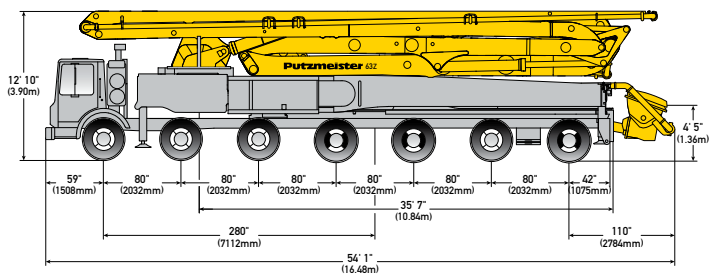

MODEL SPECIFICATIONS

Vertical reach	203' 9"	(62.10m)
Horizontal reach	190' 7"	(58.09m)
Reach from front of truck	176' 7"	(53.82m)
Reach depth	151' 11"	(46.30m)
Unfolding height	75' 6"	(23.01m)
Available pump cells		.16H, .18H LS
Front axle weight	55,700 lbs	(25,265kg)
Rear axle weight	76,260 lbs	(34,591kg)
Approximate total weight	131,960 lbs	(59,857kg)


Ergonic Pump System (EPS) and Ergonic Boom Control (EBC) are standard.
Based on Model Mack MRU 613 with .16H pump cell.

BOOM | Z-FOLD DESIGN

1st section length	35' 5"	(10.80m)
2nd section length	31' 6"	(9.60m)
3rd section length	30' 8"	(9.35m)
4th section length	44' 3"	(13.49m)
5th section length	48' 9"	(14.86m)
Maximum end hose length	10' 0"	(3.00m)
Maximum end hose weight allowance	365 lbs	(166kg)

Please follow end hose weight guidelines listed in operational manual.

OUTRIGGER LOADS | FRONT AND REAR



Front	101,165 lbf	(450 kN)
Rear	92,172 lbf	(410 kN)